

LEFT TURN LANE OR CENTER MEDIAN OPERATIONS

SIGN SPACING	
Posted Speed	Sign Spacing
55	164 m (500')
50-45	115 m (350')
<45	60 m (200')

① = Refer to SIGN SPACING TABLE for distances.


② = Required for speeds > 40 MPH

SYMBOLS


- Work area
- Cone, drum or barricade
- Sign on portable or permanent support
- Arrow board
- Barricade or drum with flashing light
- Flagger with traffic control sign

SHOULDER OPERATIONS

Type I or Type II barricade

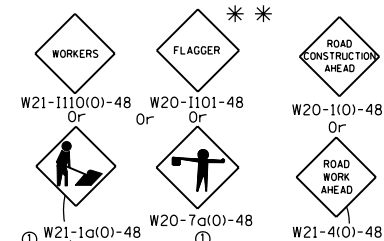

CORNER ISLAND OPERATIONS

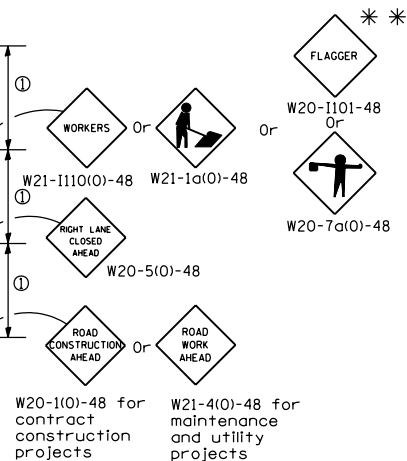

W20-1(0)-48 for contract construction projects
W21-4(0)-48 for maintenance and utility projects

GENERAL NOTES

* Cones at 8 m (25') centers for 75 m (250'). Additional cones may be placed at 15 m (50') centers. When drums or Type I or Type II barricades are used, the interval between devices may be doubled.

* * Use flagger sign only when flagger is present.

Where, at anytime, day or night, any vehicle, equipment, workers or their activities encroach on the pavement during shoulder operations or where construction requires lane closures in an urban area.

Where L is:

SPEED LIMIT

FORMULAS

70 km/h (40 mph) or less:

Metric (English)
 $L = \frac{WS^2}{150}$ $L = \frac{WS^2}{60}$

80 km/h (45 mph) or greater:

$L = 0.65(W)(S)$ $L = (W)(S)$

W = Width of offset in meters (feet).

S = Normal posted speed km/h (mph).

All dimensions are in millimeters (inches) unless otherwise shown.

DATE	REVISIONS
1-1-00	Revised GENERAL NOTES.
1-1-99	Revised barricade or drum w/ flashing light symbol & sign spacing.

URBAN LANE CLOSURE
MULTILANE INTERSECTION

STANDARD 701701-03